

Thermaloc™

THERMOBREAK

Hot & Cold Pipe Supports



QUALITY FEATURES

- Thermaloc profile ensures an airtight finish
- Thermaloc decreases installation time as it locks easily together
- Closed cell so that it will not absorb moisture or degrade with time
- Made from high density polyolefin foam
- Will not erode with pipe movement
- Fire rated to AS1530.3
- Smoke density and toxicity to BS6853
- Made from recycled material and is recyclable

SEKISUI

Australian Plant:
1-5 Parraweena Rd, Taren Point NSW 2229 Australia
PO BOX 2898, Taren Point NSW 2229 Australia
Web Address: www.sekisuiipilon.com.au
Tel: +61 2 9525 9880
Fax: +61 2 9525 8004

FOAM INTERNATIONAL

Global Foam Solutions

Thailand Plant:
Amata Nakorn Industrial Estate, 700/329 Moo 6,
Tumbol Donhua-Ioh, Amphur Muang Chonburi 20000
Thailand
Tel: +66 3821 3219 ~ 26
Fax: +66 3821 3281



Thermaloc is light weight and extremely tough. Just place the two pieces over the pipe, squeeze together gently, and apply AS1530.3 approved foil tape ensuring complete coverage.

Compliance with BCA Fire Hazard Properties

Thermaloc complies with the Building Code of Australia (BCA) specification C1.10 Fire hazard properties for materials used in Class 2 - 9 buildings*.

Spread of Flame Index: 0
 Ignition Index: 0
 Heat Evolved Index: 0
 Smoke Developed Index: 0-1
 (* foil faced)

Quick, Easy & Safe Application

No more cutting. This ensures a flat surface to butt insulation against, allowing a tight and secure joint. No fibers, no dust, no mess to clean up afterwards. No special face masks or gloves required.

Wall Thickness Available


20 mm, 25 mm, 38 mm, 50 mm walls and made to order wall thickness and ID.

Length Along Pipe

The standard "on pipe" length is 50 mm. 75 mm is available on request.

Contact Sekisui Foam International or your local agent for more information.

Technical	Specifications
Material	Crosslinked Closed Cell Polyolefin Foam
Density	300 kg /m ³
Moisture Absorption (by weight, room temp, 5 hrs)	<1%
Tensile Strength	26.4 kg/m ²
Tear Strength	8.3 kg/m ²
Thermal Conductivity (ISO8302-1991)	0.065 W/mK
Constant Working Temperature	-40 °C to 105 °C
Compressive Strength JIS 6767	3.4 kg/cm ²
BS6853 Smoke density & toxicity	R = 0.45 satisfies toxicity of combustion gases

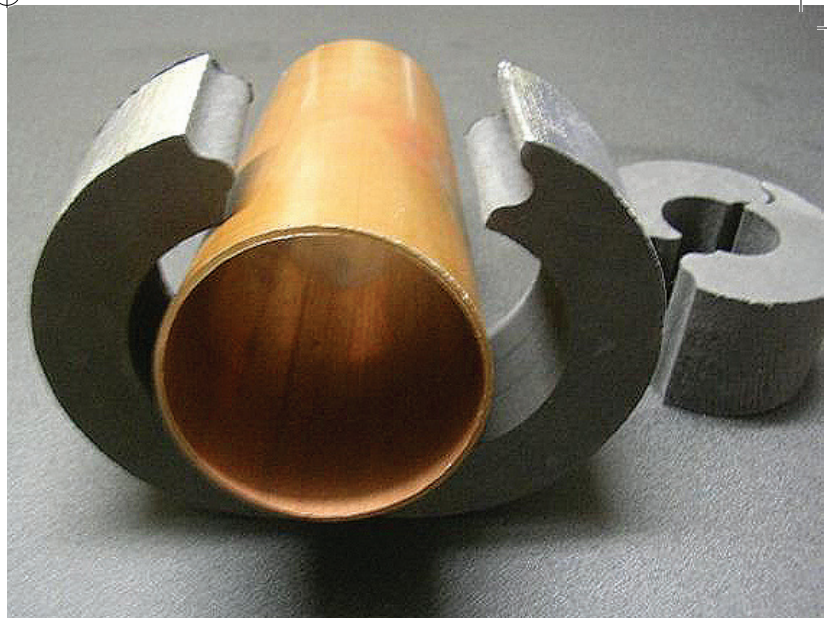

Advantages

Advantage to the end users

Built in Loc

Once tightly taped, Thermaloc will prevent any air movement through the join. This is especially important in cold line applications to prevent potential air condensation

Tough & Durable

Thermaloc pipe supports are made of high density, crosslinked, closed cell polyethylene foam. As they are closed cell they absorb negligible moisture, and retain their insulation properties throughout the life of the installation.

Non Erosion with Pipe Movement

Pipes move with contraction and expansion, eroding the ferrule. The tough PE foam will resist movement and prevent gap formation over time.

Health & Safety

As the blocks are preformed there is no need for cutting, so there is no dust and no mess. They do not emit fibrous particles during installation or over time.

Performance Life

Thermaloc is closed cell and unaffected by water and humidity. This ensures continual performance over the life of the installation.

Chemical Resistance

Thermaloc is resistant to detergents, diluted acids, alkalis, alcohols, esters and fungi ensuring performance in even the most demanding applications.

