


## TECHNICAL DATA SHEET

### Thermobreak<sup>®</sup> Acoustiplus<sup>™</sup>

<b>Material:</b>	Physically (irradiation) crosslinked open cell polyolefin foam with factory applied reinforced aluminium foil and optional pressure sensitive adhesive backing
<b>Density:</b>	25 kg/m <sup>3</sup> (foam core only)
<b>Thermal Conductivity:</b> (ASTM C518)	0.035 W/m/°K (@ 23°C mean temperature)
<b>Water absorption by volume:</b> (JIS K6767)	<1% v/v (15 mm thickness, no adhesive backing) (0.0075 g/cm <sup>2</sup> )
<b>Resistance to fungi:</b> (ASTM G21)	Zero Growth
<b>VOC Emission Rate:</b> (ASTM D5116)	Low VOC emitting ("Green Star")
<b>Noise Reduction Coefficient:</b> (ISO 354)	0.30 (10 mm thickness) 0.40 (15 mm thickness) 0.40 (24 mm thickness) 0.55 (54 mm thickness)
<b>Operating Temperature Range:</b>	-80 °C ~ +100 °C (no adhesive)
<b>Maximum Recommended Design Air Velocity:</b>	20.3 m/s (4000 fpm)

**Sound Absorption Spectra:**

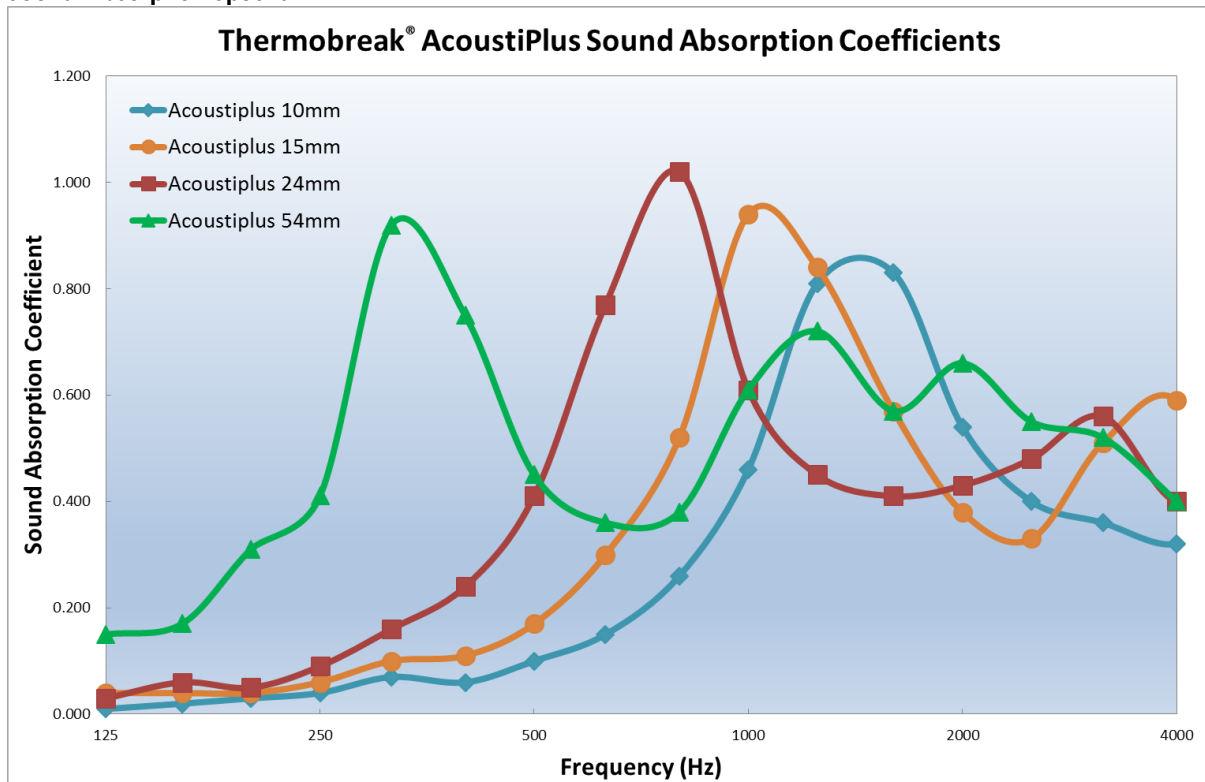

## FIRE AND SMOKE PERFORMANCE

<b>AS 1530 Part 3</b>	<b>Ignitability Index:</b> <b>Spread of Flame Index:</b> <b>Heat Evolved Index:</b> <b>Smoke Developed Index:</b>	<b>COMPLIES (AS 4254)</b> <b>0</b> <b>0</b> <b>0</b> <b>0 – 1</b>
<b>ASTM E84 (UL 723):</b>	<b>Flame Spread Index:</b> <b>Smoke Developed Index:</b>	<b>COMPLIES (NFPA 90A &amp; B)</b> <b>≤25</b> <b>≤50</b>
<b>DIN 54837</b>	<b>Burning Test</b>	<b>COMPLIES (DIN 5510:2)</b> <b>Classification S4, SR2, ST2</b>
<b>ISO 5658 Part 2</b>	<b>Flame Spread</b>	<b>COMPLIES (EN 45545:2 R1, HL3 RATING)</b>
<b>ISO 5659 Part 2</b>	<b>Smoke Density</b>  <b>Smoke Toxicity</b>	<b>COMPLIES (EN 45545:2 R1, HL3 RATING)</b>  <b>COMPLIES (EN 45545:2 R1, HL3 RATING)</b> <b>COMPLIES (DIN 5510:2)</b> <b>FED &lt; 1</b>
<b>ISO 5660 Part 1</b>	<b>Heat Release Rate</b>	<b>COMPLIES (EN 45545-2 R1, HL3 RATING)</b>
<b>ASTM E162</b>	<b>Surface Flammability</b>	<b>COMPLIES (PRIIA/NFPA 130)</b>
<b>ASTM E662</b>	<b>Smoke Density</b>	<b>COMPLIES (PRIIA/NFPA 130)</b>
<b>ASTM E1354</b>	<b>Heat Release Rate</b>	<b>COMPLIES (PRIIA)</b>
<b>BSS 7239 (Boeing)</b>	<b>Smoke Toxicity</b>	<b>COMPLIES (PRIIA)</b>
<b>BS 476 Parts 6 &amp; 7</b>		<b>CLASS 0</b>
<b>UL 181 Part 11</b>	<b>Burning Test</b>	<b>COMPLIES (AS 4254)</b>

## TOLERANCES

The following tables list tolerances for thickness, density and width of standard Thermobreak<sup>®</sup> Acoustiplus<sup>™</sup> products:

<b>Thickness</b>	
<b>Nominal Thickness</b>	<b>Tolerance</b>
10mm	-1.0mm / +1.5mm
15mm	-1.0mm / +2.0mm
24mm	-1.0mm / +2.5mm
54mm	-2.0mm / +3.5mm
Other thicknesses and/or tolerances subject to confirmation.	

<b>Density* (foam only)</b>	
<b>Nominal Density</b>	<b>Tolerance</b>
25 kg/m <sup>3</sup>	± 10%
*Applies to the foam core. The density of Thermobreak with reinforced aluminium foil will be higher.	

<b>Width (Sheet)</b>	
<b>Nominal Width</b>	<b>Tolerance</b>
1200mm	-0 / +20mm
Other widths and/or tolerances subject to confirmation.	

## COUNTRY OF MANUFACTURE

Thermobreak<sup>®</sup> Acoustiplus<sup>™</sup> insulation is manufactured in Thailand.

## ENQUIRIES

If you require any further information, please consult your local distributor or contact us at

### SEKISUI FOAM AUSTRALIA

1-5 Parraweena Road  
Taren Point  
NSW 2229  
AUSTRALIA

Tel : +61 2 9525 9880  
Fax : +61 2 9525 8004  
Email: [info@sekisuifoam.com.au](mailto:info@sekisuifoam.com.au)  
Web: [www.sekisuifoam.com.au](http://www.sekisuifoam.com.au)

### THAI SEKISUI FOAM

700/329 Moo 6, Amata Nakorn Industrial Estate  
Tumbol Donhua-loh, Amphur Muang  
Chonburi 20000  
THAILAND

Tel: +66 3821 3219 ~ 26  
Fax: +66 3821 3281  
Email: [info@thaisekisui.co.th](mailto:info@thaisekisui.co.th)  
Web: [www.thaisekisui.co.th](http://www.thaisekisui.co.th)



This information on Sekisui Foam International products is presented to the best of our knowledge. All product data is based on average values and is for guidance only. As these products are subject to constant research and development, we reserve the right to update the contents without notice.



Recommendations as to methods of post fabrication, application and use of Sekisui Foam International products are based on our experience and knowledge of the characteristics of our products and are given in good faith. As producer of the material we have no control over the application of Sekisui Foam International products and no legal responsibility is accepted for such recommendations. In particular, no responsibility is accepted by us for any system in which Sekisui Foam International products are utilised or for any application.



**Softlon** and **Thermobreak** – Registered trademarks of Sekisui Chemical Co. Ltd or its subsidiaries.

© Sekisui Pilon Pty Ltd. Date of Publication: November 2017.